



Kajaria Tiles
AUSTRALIA



2026

TILES CATALOGUE

WWW.KAJARIATILES.COM.AU

WELCOME TO KAJARIA TILES AUSTRALIA

We are Kajaria Tiles Australia, here our passion for quality, style, and innovation drives everything we do.

This catalogue will show you a collection we take a lot of pride in, its our "Bread and Butter"!

From any type of finish or sized tile, we will have it all for you. Our quality speaks for itself, have a look through this catalogue to see which one our products will help bring the vision you have for your space to life!





TABLE OF CONTENTS

300X600	04
600X600	10
200X1200	19
600X1200	21
800X800	26
1200X1200	28
800X1600	30
OUR FAVOURITES	33
TILE SPECIFICATIONS	34



300X600






ITALIANO MARFILL
HD POLISHED

001




PULPIS GREY
HD POLISHED

002

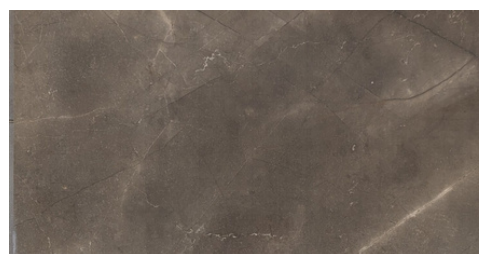

PULPIS BRONZE
HD POLISHED

003

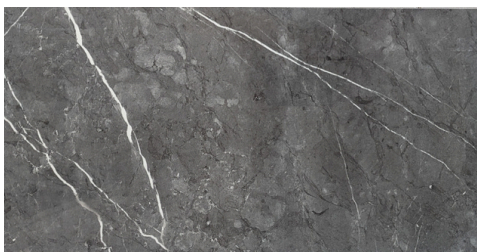

AURA NERO
HD POLISHED

004



PULPIS GRIS
HD POLISHED

005



OSLO GRIS POLISH
HD POLISHED

006



PULPIS GRIS



KASSEL BEIGE
HD STONE

001

KASSEL MARFIL
HD STONE

002

KASSEL BRONZE
HD STONE

003



CITY GREY
HD STONE

004




CITY CEMENT
HD STONE

005



PRIVLEDGE CEMENT
HD STONE

006

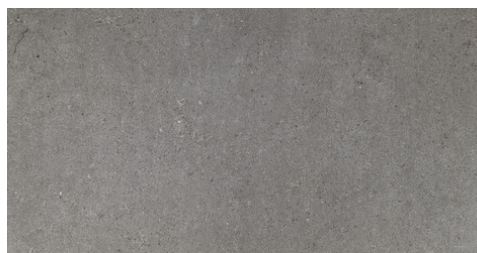

PRIVLEDGE GRIS
HD STONE

007



CHICAGO CEMENT
HD STONE

008



BERLIN GRIS
HD STONE


009



PRIVLEDGE CEMENT
PRIVLEDGE GRIS



BERLIN GRIS

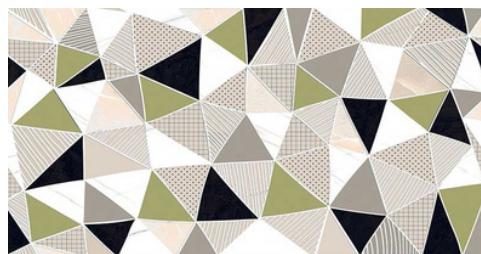

MIRAKI DECOR
DÉCOR

001



ARABIC AZUL
DÉCOR

002



JAVA DECOR
DÉCOR

003



MERIDA DECOR
DÉCOR SPARKLE

004




ETHOS DECOR
DÉCOR SPARKLE

005




MYRA DECOR
DÉCOR SPARKLE

006

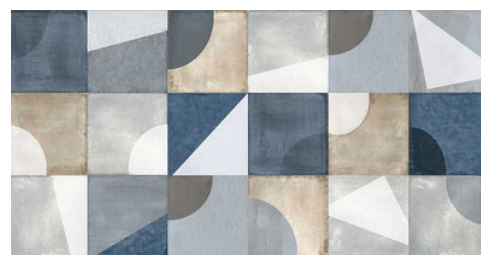

JAZZ GREY
DÉCOR SPARKLE

007

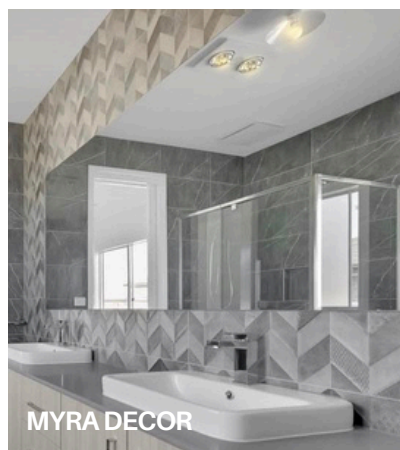

MYRA DECOR



JAZZ GREY




MERIDA DECOR



ANTARIS MULTI
PREMIUM DÉCOR

001

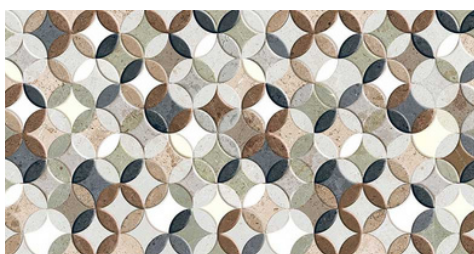

NEBIA DECOR
PREMIUM DÉCOR

002




HEXION MULTI
PREMIUM DÉCOR

003



CLASSICO DECOR
PREMIUM DÉCOR

004

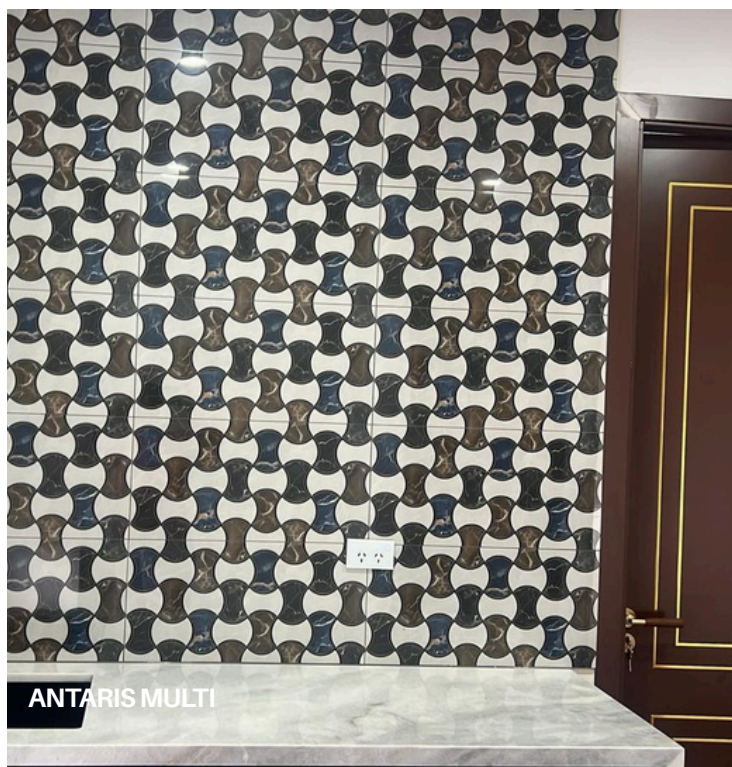

ANTARIS MULTI



HEXION MULTI




SPRING IVORY
DÉCOR ELEVATION MATT

001



MONAR BRONZE
DÉCOR ELEVATION MATT

002

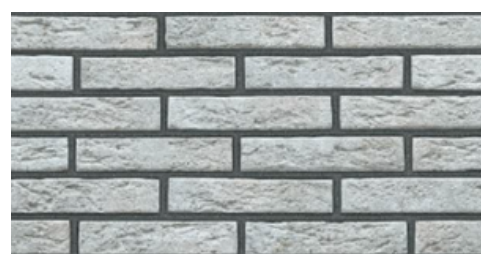

MONAR BRICKS
DÉCOR ELEVATION MATT

003



MONAR SILVER
DÉCOR ELEVATION MATT

004



MONAR STONE
DÉCOR ELEVATION MATT

005



MONAR MULTI
DÉCOR ELEVATION MATT

006



MONAR GRIS
DÉCOR ELEVATION MATT

007




MONAR BRICKS



MONAR GRIS

600x600

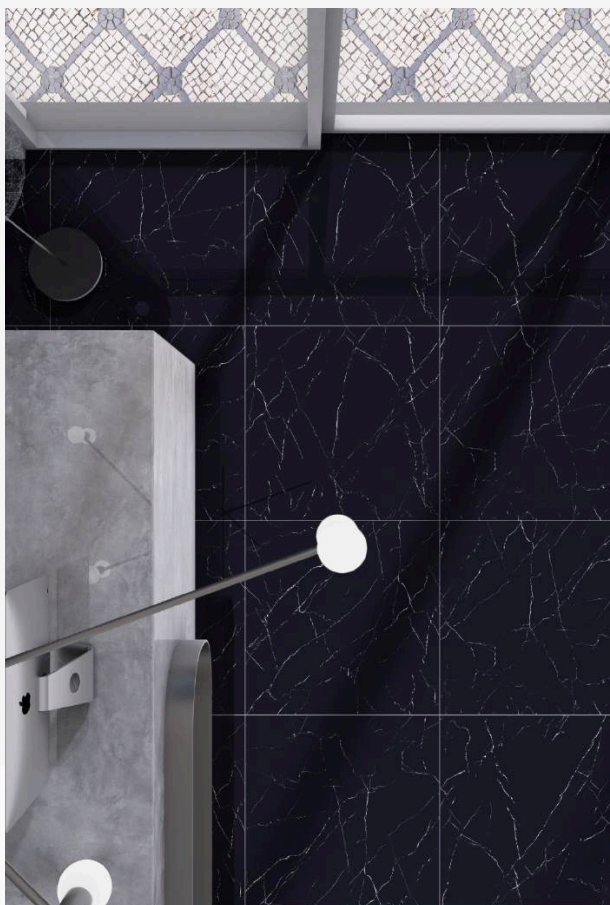



DESERT GREY
MATT

001




CLIFFSTONE GREY
MATT

002



CLIFFSTONE MARFILL
MATT

003



ARCH CREMA
MATT

004



AKOYA GRIS
MATT

005



WILLIAM GREY
MATT

006



DORIAN SILVER
MATT

007



DORIAN SILVER




ARCH CREMA



QUARTZ BLUE
TERRAZZO MATT

001



APPOLLO GREY
TERRAZZO MATT

002



APPOLLO BEIGE
TERRAZZO MATT

003




RIJEKA CREMA
TERRAZZO MATT

004



RIJEKA LIGHT GREY
TERRAZZO MATT

005

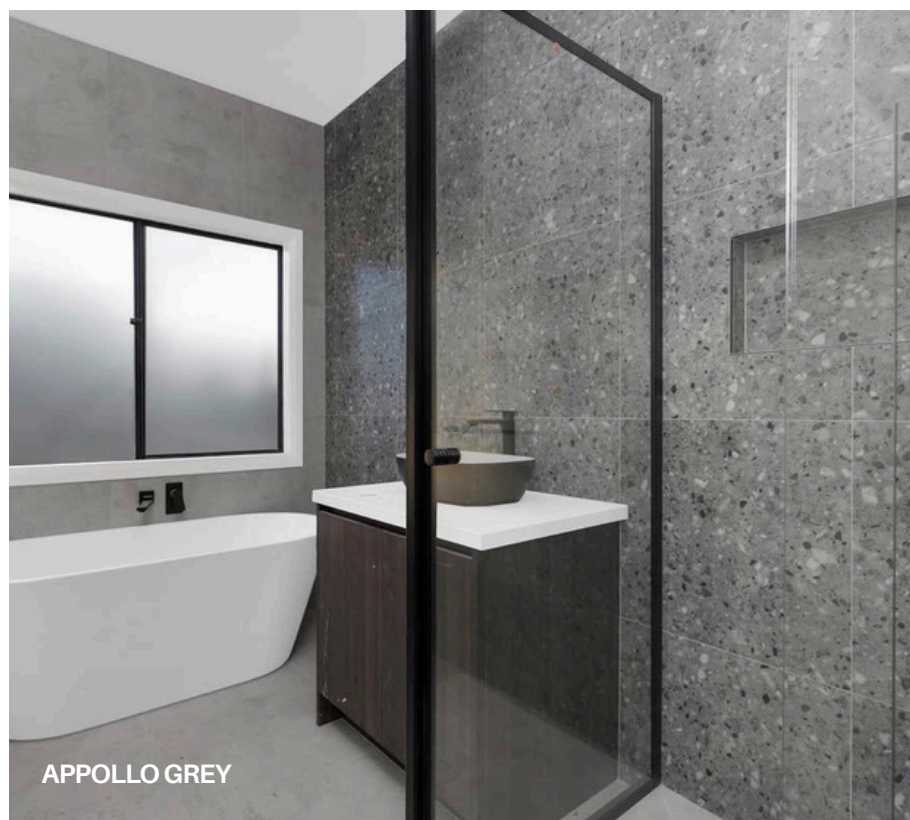

APPOLLO GREY



RIJEKA LIGHT GREY



CAIRO GRIS
HD SATIN

001

CAIRO BEIGE
HD SATIN

002

OASIS BLANCO
HD SATIN




003



GLACIER WHITE
HD SATIN

004





MARBELLA BRONCE
HD POLISHED

001

VOLGA BLUE
POLISH

002

SATUARIO CLASSIC
POLISH

003



ZEUS WHITE
POLISH

004

ATLANTIS GRIS
HD POLISH

005

OFELIA ICE
POLISH

006



ASTRA GREY
POLISH


007

ITALIANO MARFIL
HD POLISHED

008

ARTY SKY
POLISH

009



TITLIS
HD POLISHED

010

GRAFFITO BLACK
HD POLISHED

011



CALCUTTA WHITE
HD POLISH AND HD SATIN


001

TRAVERTINO MARFIL
POLISH AND SATIN

002

KASHMIR MARFIL
POLISH AND SATIN

003



ARIANA SILVER
POLISH AND MATT

004




NEBBI GREY
POLISH AND MATT

005

BOUTIQUE GREY
POLISH AND MATT

006



COSMIC GREY
POLISH AND MATT

007



ALPINE CARARRA
POLISH AND MATT

008

ONYX BIANCO
POLISH AND MATT

009



APIA ORANGE
POLISH AND MATT

010




OSLO BLANCO
POLISH AND SATIN

011



OSLO MARFIL
POLISH AND SATIN MATT

012



BERGEN GREY
POLISH AND MATT

013

ORBITO BIANCO
POLISH AND MATT

014

TAVERNA NATURAL
POLISH AND MATT

015





MOON VALLEY
HD STONE/PUNCH

001



HOLINERO
HD STONE/PUNCH

002



SILICON VALLEY
HD STONE/PUNCH

003



HOLIGRIS
HD STONE/PUNCH

004



MOON VALLEY




SILICON VALLEY



VENCY GREY
CARVING

001

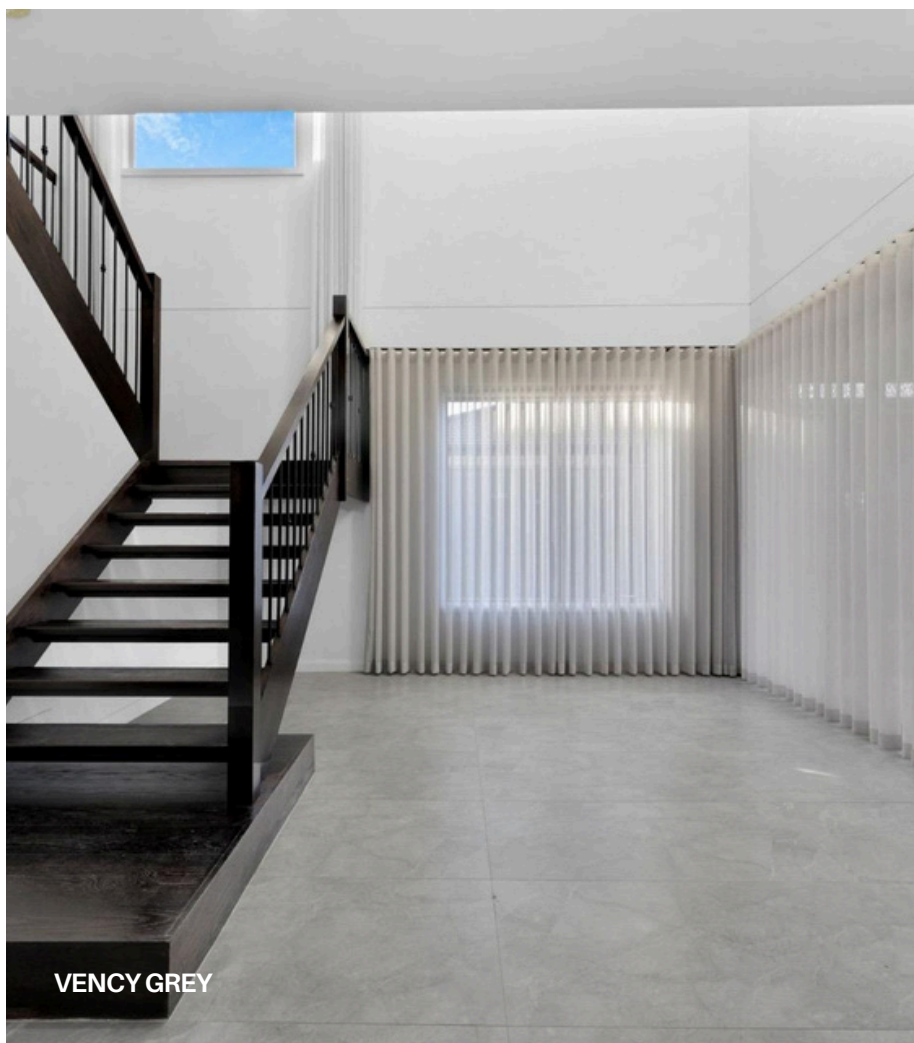



200x1200



VANCOUVER MAHOGANY
PREMIUM WOOD/ PUNCH

001





600x1200





LEVANTE NATURALE
POLISH


001

OSLO MARFIL
POLISH

002

MILAN GREY
POLISH

003

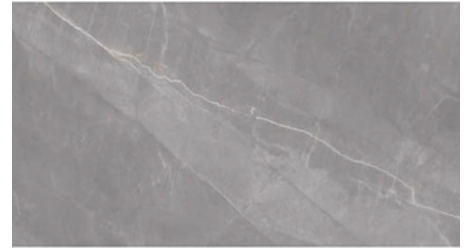

ROYAL SATUARIO
POLISH


004

EDEN SATUARIO
HD POLISH

005

ARMANI GRIGIO
POLISH

006

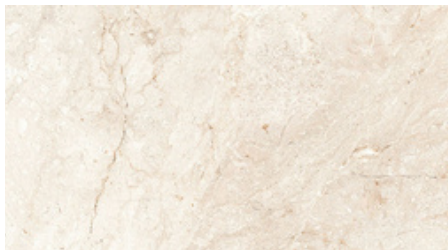

CARLA ONYX GREY
POLISH

007

KASHMIR MARFIL
POLISH

008



EDEN SATUARIO



GRIS PULPIS GREY
MATT

001



GRIS PULPIS GREY



APEX CREMA
VELVET SATIN

001

DERBY GREY
VELVET SATIN

002



DERBY GREY



IROSTONE SILVER
CARVING

001

VENCY GREY
CARVING

002



IROSTONE SILVER



800x800





KASHMIR MARFIL
POLISH

001



CARARA PISANO
POLISH

002



ORBITO BIANCO
POLISH

003




KASHMIR MARFIL



CARARA PISANO



1200x1200

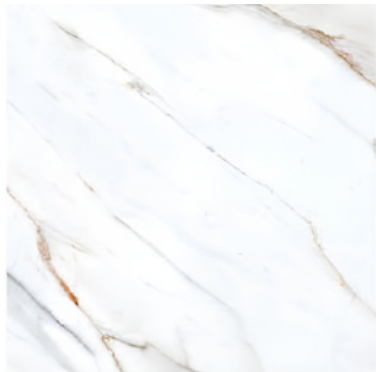

WAN SATUARIO
POLISH AND MATT

001





800x1600





ATLAS GREEN
POLISH


001

RUBY RED
POLISH

002

VICTORIA STERLING
POLISH

003

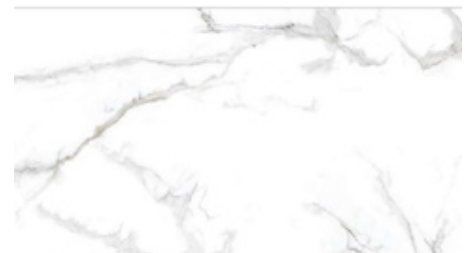

TRI-LIGHT NATURAL
POLISH


004

WAN SATUARIO
HD POLISH

005

GERMAN SATUARIO
POLISH

006

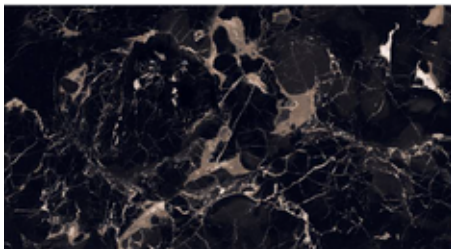


BLACK GLASSIER
POLISH


007



EDEN SATUARIO

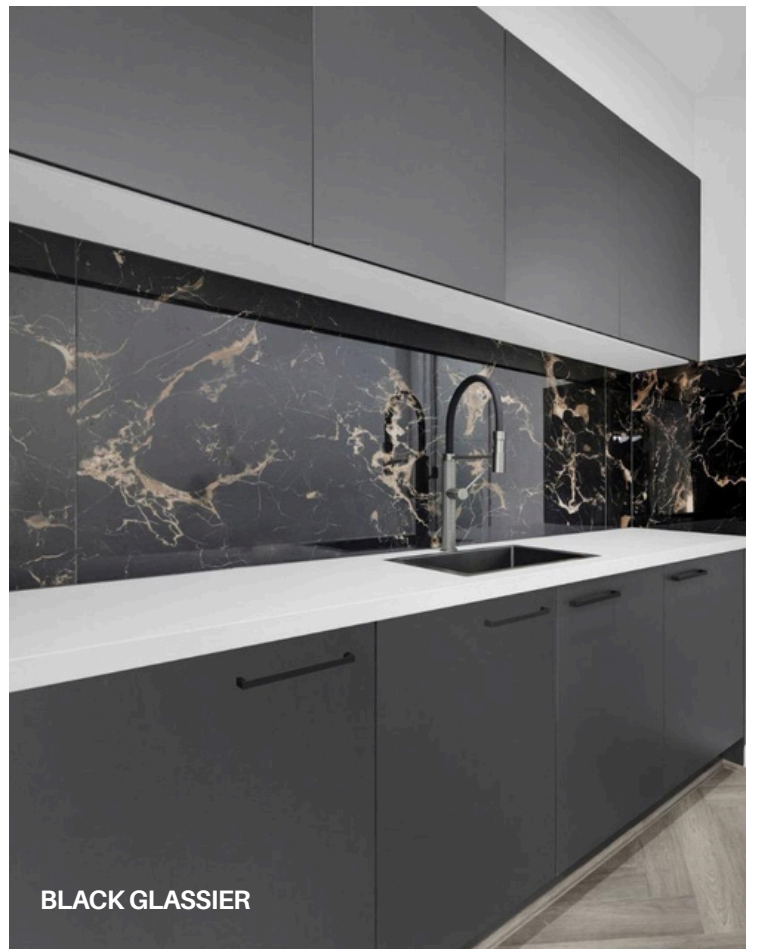

BLACK GLASSIER

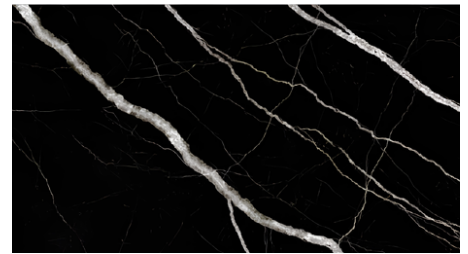

VIOLA MERLIN
PREMIUM POLISH

001

ONYX LAVA
PREMIUM POLISH

002

HARVEST BLACK
PREMIUM POLISH

003




CUSTOMER FAVORITES

These are the pieces our client based can't get enough of. From bestselling polish tiles to our always-sold-out carving finished tiles, this collection is made up of the most loved and most lived-in designs in our catalog.




KASHMIR MARFIL 600X600
POLISH AND MATT

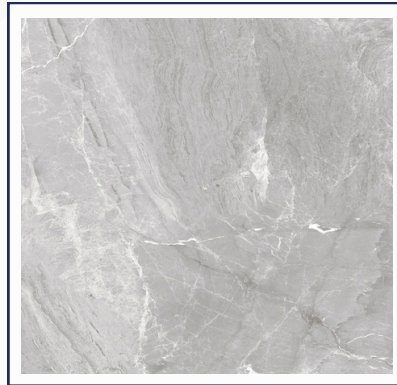


ARIANA SILVER 600X600
POLISH AND MATT



VENCY GREY 600X600
CARVING

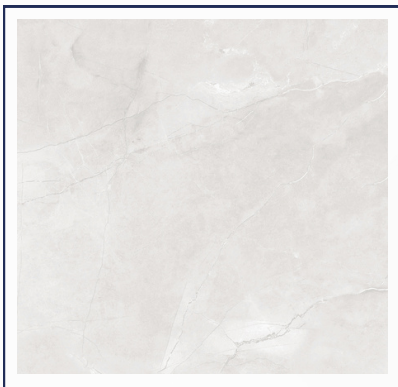

ORBITO BIANCO 600X600
POLISH AND MATT

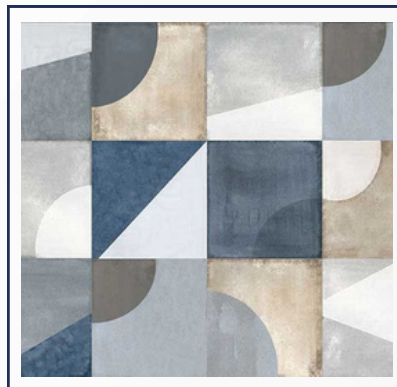

JAZZ GREY 300X600
DÉCOR SPARKLE



MYRA DECOR 300X600
DÉCOR SPARKLE

PACKING DETAILS

Dimensions (mm)	No. of Slabs / Box	Coverage Area
300X600	05	0.9 M ²

TECHNICAL SPECIFICATIONS

S.No	Technical Characteristics	ISO 13006:2018 Group B1b Standard's Requirement	Kajaria Eternity Tile's Specifications	Test method
1.	Deviation in length & width	± 0.3 %	± 0.10 %	ISO 10545-2
2.	Deviation in thickness	± 5.0 %	± 4.00 %	
3.	Deviation in Straightness of sides	± 0.3%	± 0.10 %	
4.	Deviation in Rectangularity	± 0.3 %	± 0.10 %	
5.	Deviation in Surface Flatness	± 0.4 %	± 0.15 %	
6.	Surface quality	95% of the tiles shall be free from visible defects	95% of the tiles shall be free from visible defects	
7.	Modulus of rupture	Avg. 30 N/mm ² , Individual Min 27 N/mm ²	≥ 30 N/mm ²	ISO 10545-4
8.	Breaking strength	Minimum 1100 N	≥ 1100 N	ISO 10545-4
9.	Bulk Density	Minimum 2.00 g/cc	≥ 2.00 g/cc	IS 13630-2
10.	Glossiness	Manufacture to state the class	Min 5 for Rustic/Matt/Satin Finish Min 90 for Polish Finish	Glossimeter 60 degrees
11.	Water Absorption	0.5 < Eb ≤ 3 %	≤ 1.00 %	ISO 10545-3
12.	Resistance to surface abrasion of Glazed tiles	Report abrasion class and cycles passed	PEI-Class III to Class IV	ISO 10545-7
13.	Thermal expansion from ambient temperature to 100 ° C	Test method available	7x10 ⁻⁴ K ⁻¹ Maximum	ISO 10545-8
14.	Thermal shock resistance	Test method available	10 cycles Minimum	ISO 10545-9
15.	Moisture expansion	Maximum 0.02 Millimeter/metre Test method available	Maximum 0.02 millimeter/metre	IS 13630-3 ISO 10545-10
16.	Crazing resistance (Glazed Tiles)	Required	Passes 4 cycles at 7.5 kg/cm ²	ISO 10545-11
17.	Frost resistance	Required	100 cycles Minimum	ISO 10545-12
18.	Resistance to Household Chemicals & Swimming Pool Salts #	Minimum GB	Min GB	ISO 10545-13
19.	Resistance to low & high concentration of acids & alkalis #	Manufacturer to state classification	Min GLB,GHB	ISO 10545-13
20.	Stain resistance**	Min Class 3	Min Class 3	ISO 10545-14
21.	Slipperiness	Test method available	≥ R-10 for Rustic/Matt/Satin Finish ≥ R-9 for Polish Finish	DIN 51130:2014
22.	Co-efficient of friction	Manufacture to state the clas	> 0.34 for Rustic/Matt/Satin Finish > 0.20 for Polish Finish	ISO 10545-17
23.	Scratch hardness of surface(Moh's scale)	Test method available	Min 5	EN 101
24.	Impact Resistance	Test method available	No identification of cracking	ISO 10545-5

** Vitrified tiles have resistance to most of the stains / chemicals but, it is recommended to take due care while laying and for day-to-day maintenance.

Resistance to acids & alkalies (Exception of Hydrofluoric Acid & its Compounds)

- Colours in the catalogue are as accurate as printing process allows. Please check actual tile sample before making the final selection.
- Sizes mentioned in the catalogue are nominal sizes only.
- No claim will be entertained once the tiles are fixed.
- For better laying, please follow the instructions on the packaging box.
- In case it is required to lay the tiles on wall or floor in STAGGERED PATTERN, then always lay them in Overlap 20:80 ratio, as shown in VISUAL 1 instead of Brick pattern (overlap 50:50 ratio), as shown in VISUAL 2.
- Please make sure to check the shade/finish with the sales agent/dealer before making the final purchase because there might be variation in actual finish and that shown in the catalogue. The company will not bear any loss in such case.



VISUAL 1



VISUAL 2



PACKING DETAILS

Dimensions mm	No of Slabs / Box	Coverage Area
800X1600	02	2.56 M ²
600X1200	03	2.16 M ²
200X1200	06	1.44 M ²
800X800	03	1.92 M ²
600X600	04	1.44 M ²

TECHNICAL SPECIFICATIONS

S.No	Technical Characteristics	* IS 15622:2017, *EN 14411:2016 & ISO 13006:2018 Group Bla (Annex G) Standard's Requirement	Kajaria Eternity Tile's Specifications	Test method
1.	Deviation in length & width	± 0.1 % ± 0.6 %/ ± 0.3 %	± 0.10 %	IS 13630-1 EN ISO 10545-2
2.	Deviation in thickness	± 5.0 %	± 4.00 %	IS 13630-1 EN ISO 10545-2
3.	Deviation in Straightness of sides	± 0.1 % ± 0.5 %/± 0.3 %	± 0.10 %	IS 13630-1 EN ISO 10545-2
4.	Deviation in Rectangularity	± 0.1 % ± 0.5 %/± 0.3 %	± 0.10 %	IS 13630-1 EN ISO 10545-2
5.	Deviation in Surface Flatness	± 0.5 % ± 0.5 %/± 0.4 %	± 0.15 %	IS 13630-1 EN ISO 10545-2
6.	Surface quality	95% of the tiles shall be free from visible defects	95% of the tiles shall be free from visible defects	IS 13630-1 EN ISO 10545-2
7.	Modulus of rupture	Avg. 35 N/mm ² , individual Min 32 N/mm ²	≥ 40 N/mm ²	IS 13630-6 / EN ISO 10545-4
8.	Breaking strength	Minimum 1300 N	≥ 1600 N	IS 13630-6 / EN ISO 10545-4
9.	Bulk Density	Minimum 2.20 g/cc	≥ 2.25 g/cc	IS 13630-2
10.	Glossiness	Manufacture to state the class	Min 5 for Rustic/Matt/Satin Finish Min 90 for Polish Finish	Glossimeter 60 degrees
11.	Water Absorption	≤ 0.08 %, Individual Max 0.1% ≤ 0.5 %, Individual Max. 0.6 %	≤ 0.08 %, Individual Max 0.1% ≤ 0.3 % (Only for 40x80 & 13x80 cm)	IS 13630-2 / EN ISO 10545-3
12.	Resistance to surface abrasion of Glazed tiles	Minimum Class II Report abrasion class and cycles passed	PEI-Class III to Class IV	IS 13630-11 EN ISO 10545-7
13.	Thermal expansion from ambient temperature to 100 ° C	Test method available	6x10 ⁻⁴ K ⁻¹ Maximum	IS 13630-4 EN ISO 10545-8
14.	Thermal shock resistance	10 cycles Minimum Test method available	10 cycles Minimum	IS 13630-5 EN ISO 10545-9
15.	Moisture expansion	Maximum 0.02 Millimeter/Metre Test method available	Nil	IS 13630-3 EN ISO 10545-10
16.	Crazing resistance (Glazed Tiles)	Passes 4 cycles at 7.5 kg/cm ² Required	Passes 4 cycles at 7.5 kg/cm ²	IS 13630-9 EN ISO 10545-11
17.	Frost resistance	Required	100 cycles Minimum	IS 13630-10 EN ISO 10545-12
18.	Resistance to Household Chemicals & Swimming Pool Salts #	Minimum Class AA Minimum GB	Minimum Class AA Minimum GB	IS 13630-8 EN ISO 10545-13
19.	Resistance to low & high concentration of acids & alkalis #	Manufacturer to state classification	Minimum Class AA Minimum GLB,GHB	IS 13630-8 EN ISO 10545-13
20.	Stain resistance**	Minimum Class 1 Minimum Class 3	Minimum Class 1 Minimum Class 3	IS 13630-8 EN ISO 10545-14
21.	Slipperiness	Test method available	≥ R-9 to R-10 for Rustic/Matt/Satin Finish ≥ R-9 for Polish Finish	DIN 51130:2014
22.	Co-efficient of friction	Manufacture to state the class	≥ 0.32 for Rustic/Matt/Satin Finish > 0.20 for Polish Finish	ISO 10545-17
23.	Scratch hardness of surface(Moh's scale)	Minimum 5 Test method available	Min 6 for Rustic/Matt/Satin Finish Min 5 for Polish/Marbletech Finish	IS 13630-13 EN 101
24.	Impact Resistance	Minimum 0.55 Test method available	Min 0.55 & No identification of cracking	IS 13630-14 EN ISO 10545-5

Resistance to acids & alkalis (Exception of Hydrofluoric acid & its compounds)

** Vitrified tiles have resistance to most of the stains / chemicals but, it is recommended to take due care while laying and for day-to-day maintenance.

* Applicable in Gailpur plant only.

- Colours in the catalogue are as accurate as printing process allows. Please check actual tile sample before making the final selection.
- Sizes mentioned in the catalogue are nominal sizes only.
- No claim will be entertained once the tiles are fixed.
- For better laying, please follow the instructions on the packaging box.
- In case it is required to lay the tiles on wall or floor in STAGGERED PATTERN, then always lay them in Overlap 20:80 ratio, as shown in VISUAL 1 instead of Brick pattern (overlap 50:50 ratio), as shown in VISUAL 2.

■ Please make sure to check the shade/finish with the sales agent/dealer before making the final purchase because there might be variation in actual finish and that shown in the catalogue. The company will not bear any loss in such case.



VISUAL 1 ☒



VISUAL 2 ☐

Contact

1/1812 Sydney Rd, Campbellfield VIC 3061

info@kajariatiles.com.au

+61 450 040 215 (Showroom)

+61 405 445 243 (Operations)

[@kajariatilesaustralia](https://www.kajariatilesaustralia.com.au)

www.kajariatiles.com.au

