

Kajaria Tiles
AUSTRALIA




QBISA

QUALITY BUILDING & INDUSTRIAL SUPPLIES AUSTRALIA

Feature of Product

Hybrid Structure

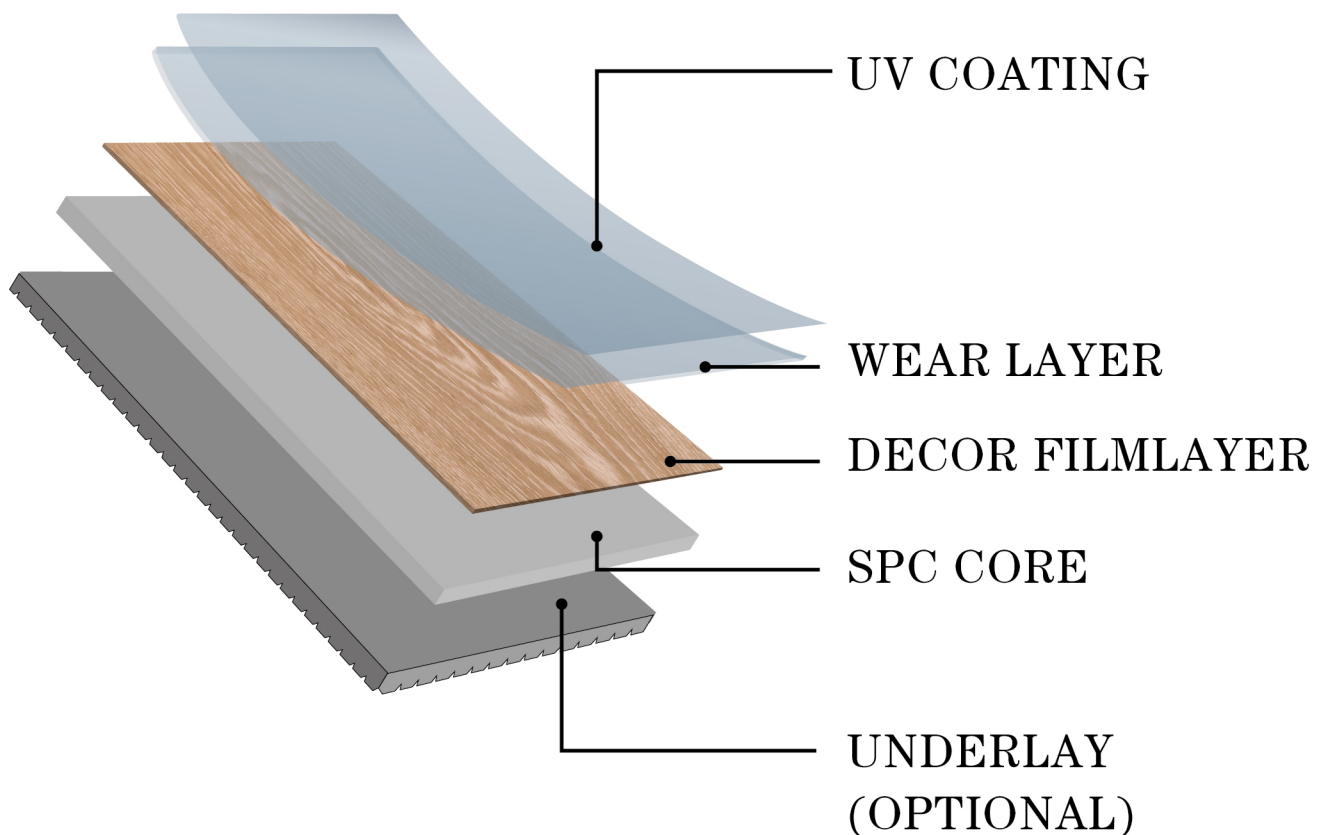



TEXTURE OPTIONS

Handscrape/Antique wood/Crystal/Registered in embossed

PERFORMANCE	EN Norms	Result	ASTM Norms	Result
Dimension Squareness and Straightness	EN 427	Squareness:0.18mm Straightness:0.07mm		
Dimensional Stability and Curling	EN 434:1994	Stability:Pass 0.1% Curling:Pass 0.06mm	ASTM F1700:2004	PASS 0.013in/ft
Flexibility			ASTM F137:2008	Pass 100mm
Chemical Resistance	EN 423	Pass	ASTM F925	Pass
Resistant to Impact			ASTM F1265:2003A	Pass
Color Fastness to Artificial light	EN 20105: B02 method A	Pass, >=Grade6	ASTM F1515	Pass
Residual Indentation after static loading"	EN 433	Pass, 0.06mm	ASTM F970	Pass
Slip Resistance	EN 13893	Class DS		
Behaviour to Fire	EN 13501-1	Bfi-S1	ASTM E648-10	Pass/Class 1
Smoke Density			ASTM E662	Pass, <=450
Wear Resistance	EN660-2:1999 /EN649-2011	Group T		
Sound insulation material performance test			ASTM E492-2009 ASTM E90-2009	IIC=68 STC=73
Static Coefficient of Friction of Polish Coated Flooring Surfaces			ASTM D2047-11	Dry:0.38 Wet:0.8
Thermal Resistance	EN12664	Pass 0.12K/W		





STANDARD

Size: 1524*228*5*0.5+2mm

Kajaria Tiles
AUSTRALIA



9901 LIGHT GREY



9902 GREY OAK




9903 SPOTTED GUM



9904 CAIRO OAK



9905 WARE OAK

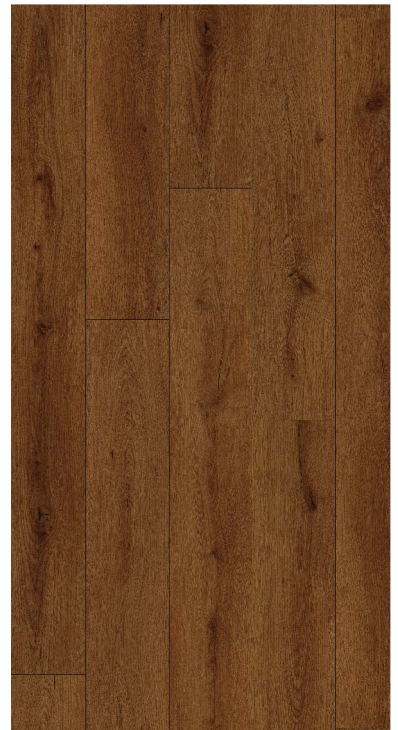

9906 THURN OAK

STANDARD

Size: 1524*228*5*0.5+2mm

Kajaria Tiles
AUSTRALIA



9907 YORK OAK



9908 JARRAH



9909 BLACKBUTT



9910 McCall OAK



9911 CLASSIC OAK

Kajaria Tiles
AUSTRALIA

Q BISA
QUALITY BUILDING & INTERIORS SUPPLIER AUSTRALIA



HERRINGBONE

Size: 640*128*5*0.5+2mm

Kajaria Tiles
AUSTRALIA



H9921 LUCILE HICKORY



H9922 MINTO HICKORY



H9904 CAIRO OAK



H9901 LIGHT GREY



H9909 BLACKBUTT



H9911 CLASSIC OAK

Kajaria Tiles
AUSTRALIA

 **QBISA**
QUALITY BUILDING & INDUSTRIAL SUPPLIES AUSTRALIA



TILE HYBRID

Size: 605*310*5*0.5+2mm

Kajaria Tiles
AUSTRALIA



T99892 VENCY GREY HYBRID



T99835 CARRARA WHITE HYBRID


WPC QUADS

Size: 2400*28*15mm



Feature of Product

Laminate Flooring

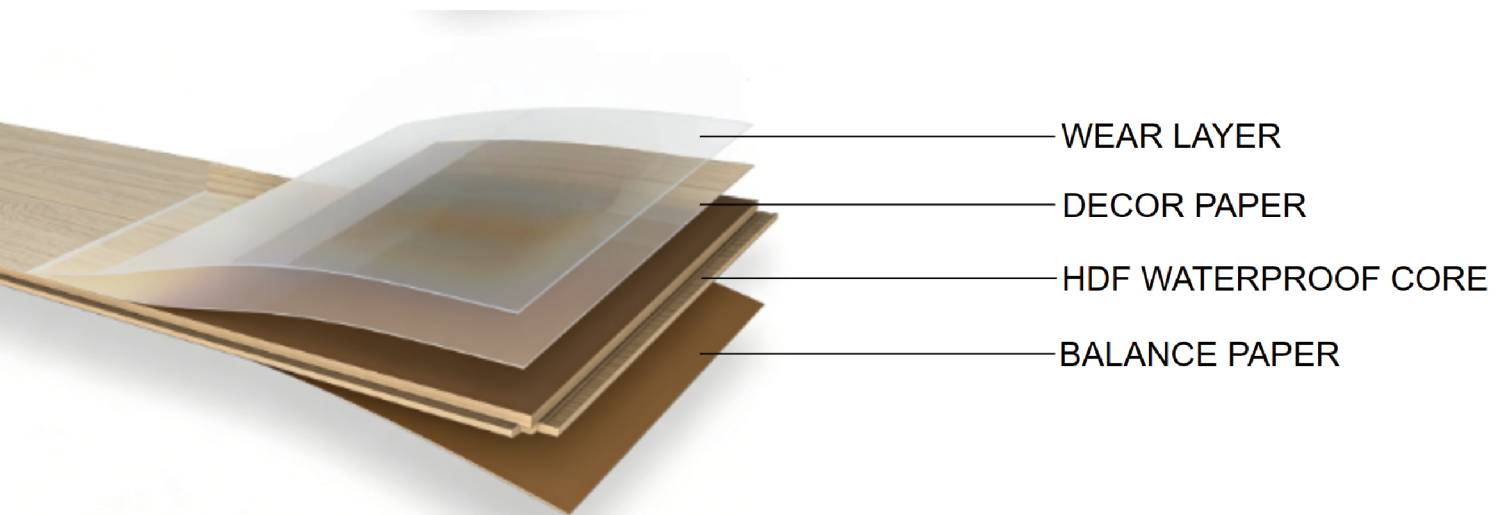

Inspection Items	EN Standard	Result	US Standards	Result
Diagonal Level Difference	EN 311	Pass, convex ≤ 1%	/	
Δaverage	EN17539:2021	Pass, 1% ≤	/	
Squareness	EN17539:2021	Pass, Sqmax ≤ 0.3mm	/	
Wear Resistance	EN 16094	Pass, ≥ 3000 cycle	/	
Moisture Content	EN 322	Pass, within 4%~9%	ASTM D4442	Pass
Slip Resistance	EN 13893	Class DS	/	
Absorb Expansion Rate	ISO 4760:2022	24h ≤ 11%	NALFA LF-01	24h ≤ 11%
Dimensional Stability	ISO 24339	Pass	ASTM F2199	Pass
Impact Resistance	EN 438-2	Pass, ≥ 1600mm	/	
Resistance to Staining	EN 438-2	Pass	/	

Kajaria Tiles
AUSTRALIA

QBISA
QUALITY BUILDING & INDUSTRIAL SUPPLIES AUSTRALIA



LAMINATE FLOORING

Size: 1218MM(L)X197MM(W)X12MM(T) 880kgs/m³ HDF

Kajaria Tiles
AUSTRALIA



LAM9901-LIGHT GREY



LAM9903-SPOTTED GUM



LAM9905-WARE OAK



LAM9909-BLACKBUTT



LAM9910-McCall OAK



SGS



UNICLIC[®]
PATENTED TECHNOLOGY



KAJARIA TILES AUSTRALIA & QBISA



+61 3 8759 5042

+61 450 040 215



info@kajariatiles.com.au



Showroom-1/1812 Sydney Road, Campbellfield VIC 3061

Warehouse-31A Metrolink Circuit Campbellfield VIC 3061



www.kajariatiles.com.au

YOUR TRUSTED SUPPLIERS FOR TILES, BATHWARE, KITCHEN, FLOORING
AND SPECIALIST INDUSTRIAL SUPPLIES!